



PA 52 Aluminium garage door profile filled with CFC - free foam



Hmax = 5000 mm Lmax* = 3000 mm Fmax = H x L = 8.0 m²

* for the 1st class of wind load resistance according to EN 12424 norm under the other conditions mentioned in the technical catalogue and documentation for production of gates


PA 55 Aluminium garage door profile filled with CFC - free foam



Hmax = 5000 mm Lmax* = 3000 mm Fmax = H x L = 9.5 m²

* for the 1st class of wind load resistance according to EN 12424 norm under the other conditions mentioned in the technical catalogue and documentation for production of gates


PA 77 Aluminium garage door profile filled with CFC - free foam



Hmax = 5000 mm Lmax* = 6000 mm Fmax = H x L = 15.0 m²

* for the 1st class of wind load resistance according to EN 12424 norm under the other conditions mentioned in the technical catalogue and documentation for production of gates


PE 55 Aluminium extruded door profile



Hmax = 5000 mm Lmax* = 6500 mm Fmax = H x L = 15.0 m²




PE 100 Aluminium extruded door profile



Hmax = 5000 mm Lmax* = 7000 mm Fmax = H x L = 11.5 m²


PA 52 Aluminium garage door profile filled with CFC - free foam



Hmax = 5000 mm Lmax* = 3000 mm Fmax = H x L = 8.0 m²

* for the 1st class of wind load resistance according to EN 12424 norm under the other conditions mentioned in the technical catalogue and documentation for production of gates


PA 55 Aluminium garage door profile filled with CFC - free foam



Hmax = 5000 mm Lmax* = 3000 mm Fmax = H x L = 9.5 m²

* for the 1st class of wind load resistance according to EN 12424 norm under the other conditions mentioned in the technical catalogue and documentation for production of gates


PA 77 Aluminium garage door profile filled with CFC - free foam



Hmax = 4770 mm Lmax* = 6000 mm Fmax = H x L = 15.0 m²


* for the 1st class of wind load resistance according to EN 12424 norm under the other conditions mentioned in the technical catalogue and documentation for production of gates

PE 55 Aluminium extruded door profile



Hmax = 5000 mm Lmax* = 6500 mm Fmax = H x L = 15.0 m²


PA 52 Aluminium garage door profile filled with CFC - free foam



Hmax = 5970 mm Lmax* = 3000 mm Fmax = H x L = 8.0 m²

* for the 1st class of wind load resistance according to EN 12424 norm under the other conditions mentioned in the technical catalogue and documentation for production of gates


PA 55 Aluminium garage door profile filled with CFC - free foam



Hmax = 4930 mm Lmax* = 3000 mm Fmax = H x L = 9.5 m²

* for the 1st class of wind load resistance according to EN 12424 norm under the other conditions mentioned in the technical catalogue and documentation for production of gates


PA 77 Aluminium garage door profile filled with CFC - free foam



Hmax = 2840 mm Lmax* = 6000 mm Fmax = H x L = 15.0 m²


* for the 1st class of wind load resistance according to EN 12424 norm under the other conditions mentioned in the technical catalogue and documentation for production of gates

PE 55 Aluminium extruded door profile




Hmax = 3980 mm Lmax* = 6500 mm Fmax = H x L = 15.0 m²


Garage door profiles

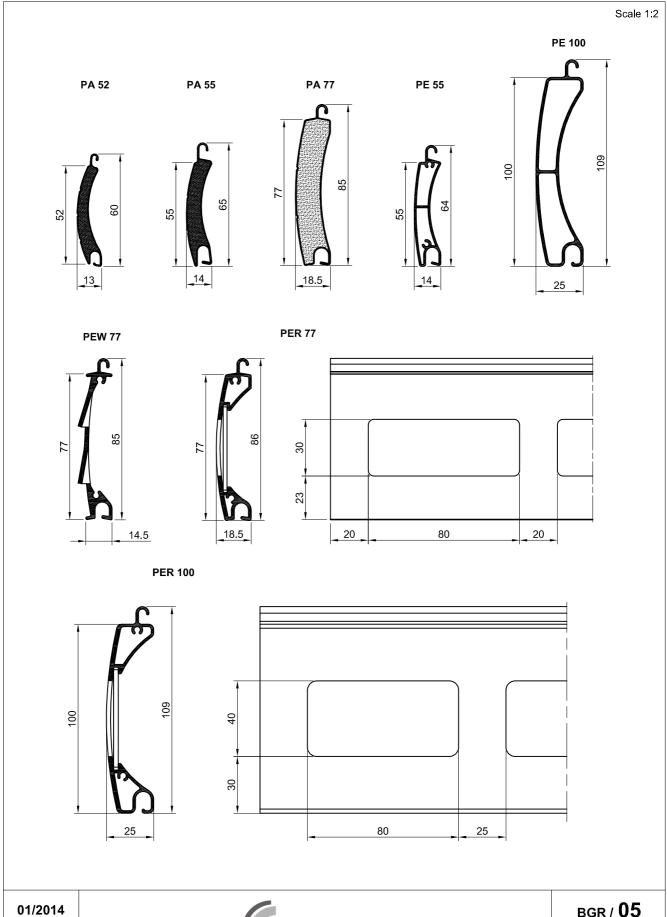

Guide channels, endslats

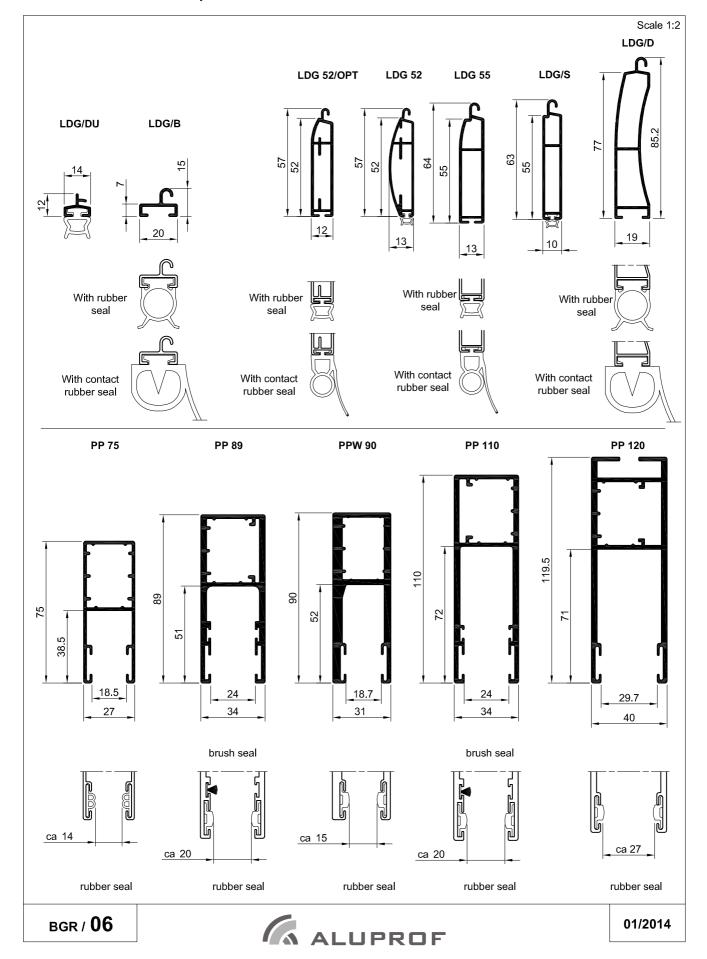


Console, shutter boxes and end caps

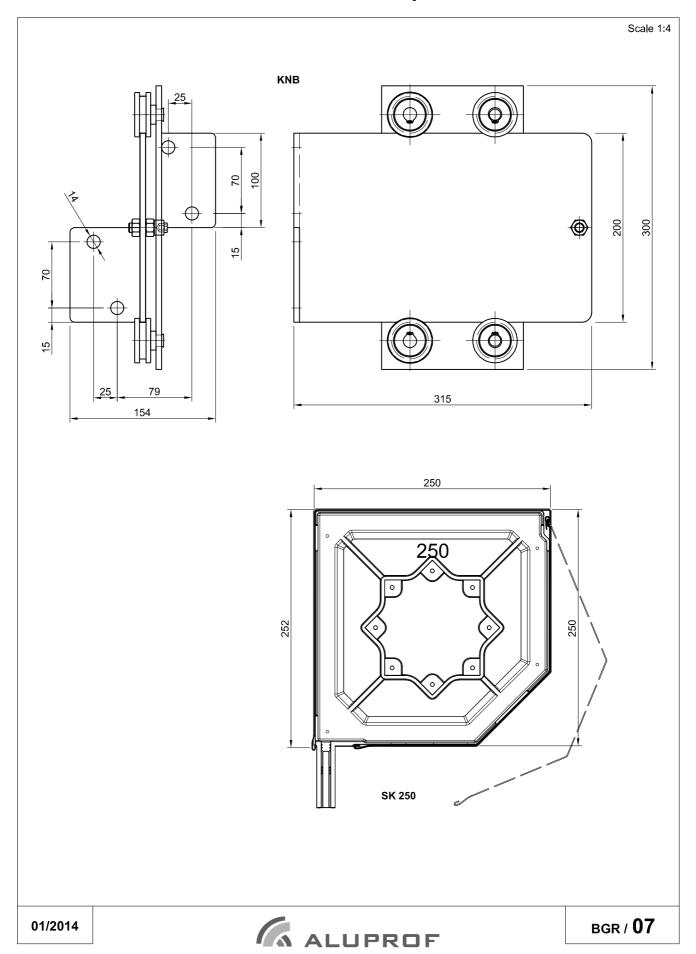


BGR

Console, shutter boxes and end caps

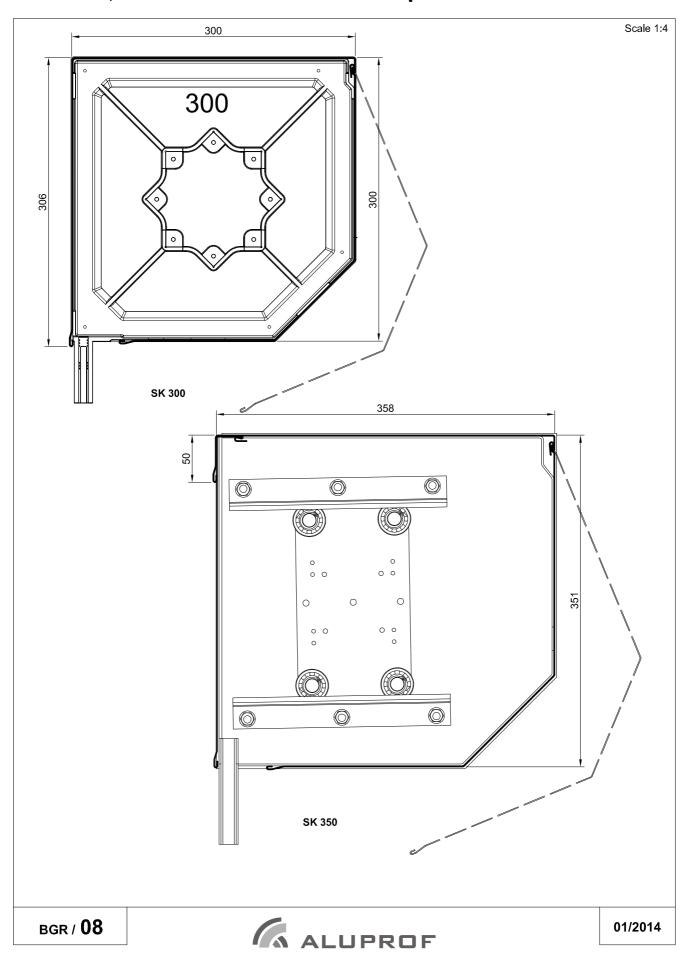


Console, shutter boxes and end caps

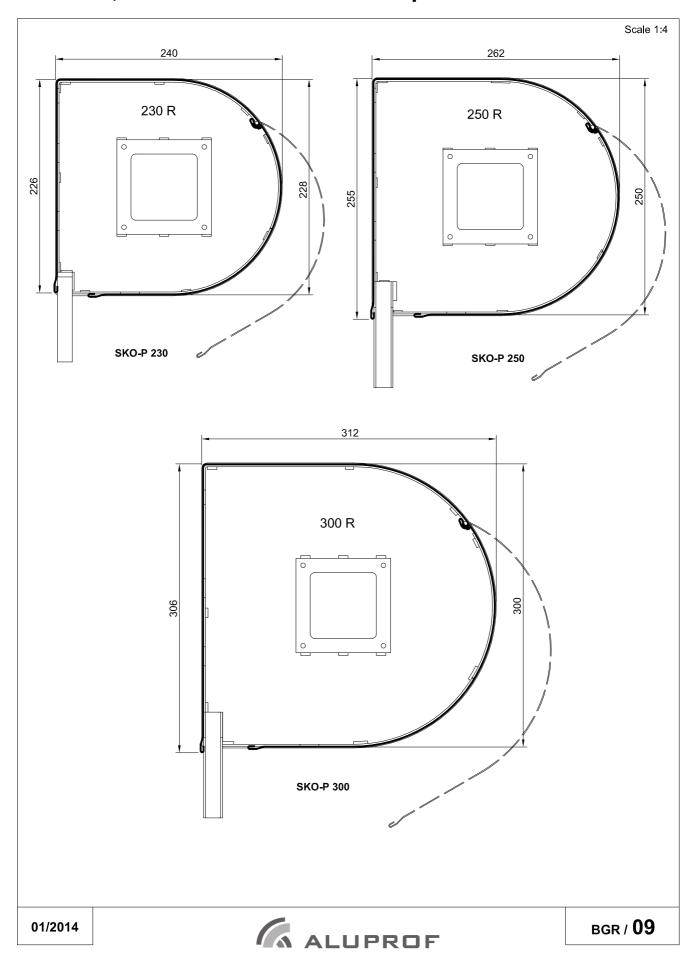


BGR/KNB




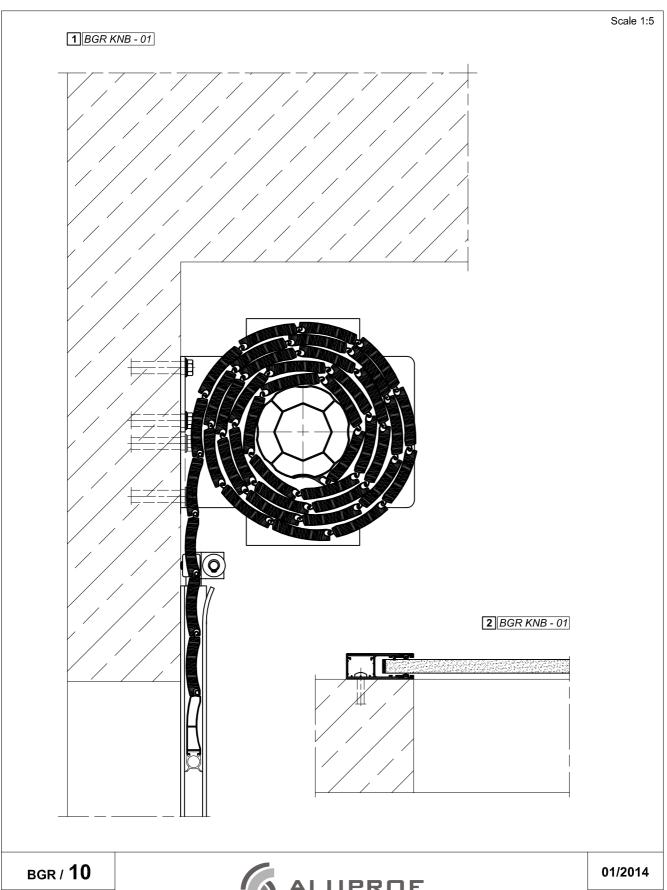



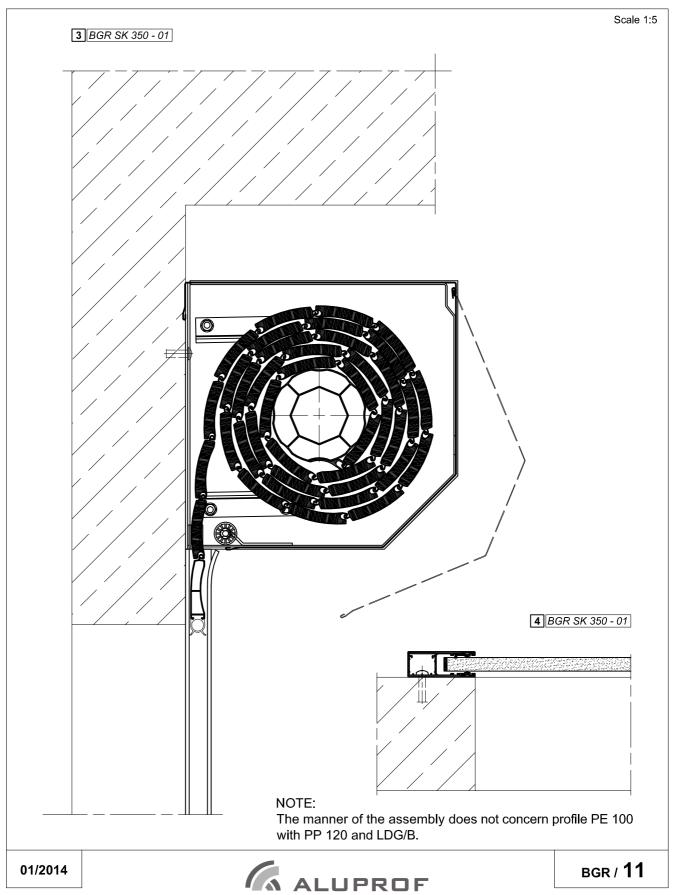



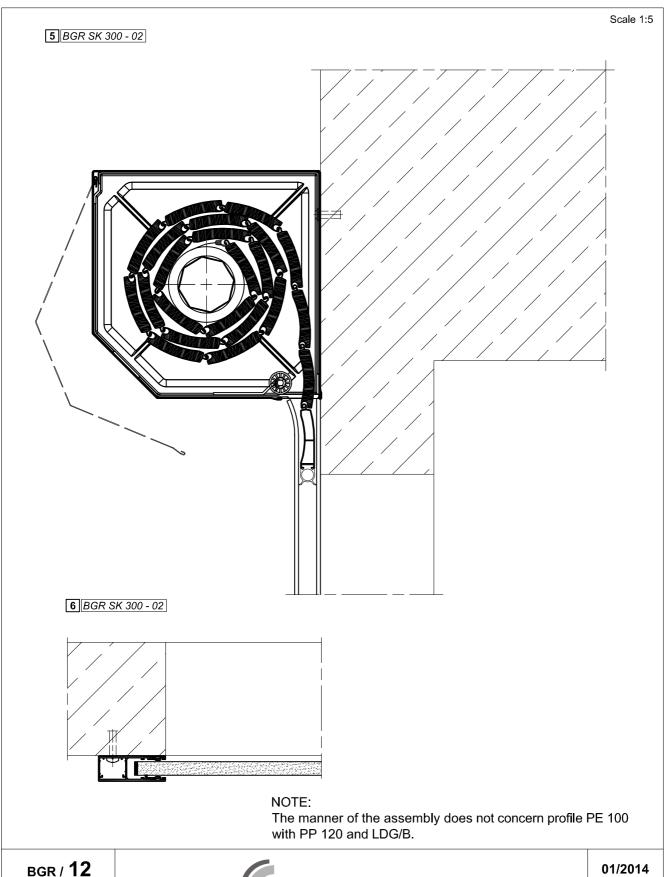




Scale 1:5 **7** BGR SK 250 - 03 8 BGR SK 250 - 03 The manner of the assembly does not concern profile PE 100 with PP 120 and LDG/B.

ALUPROF



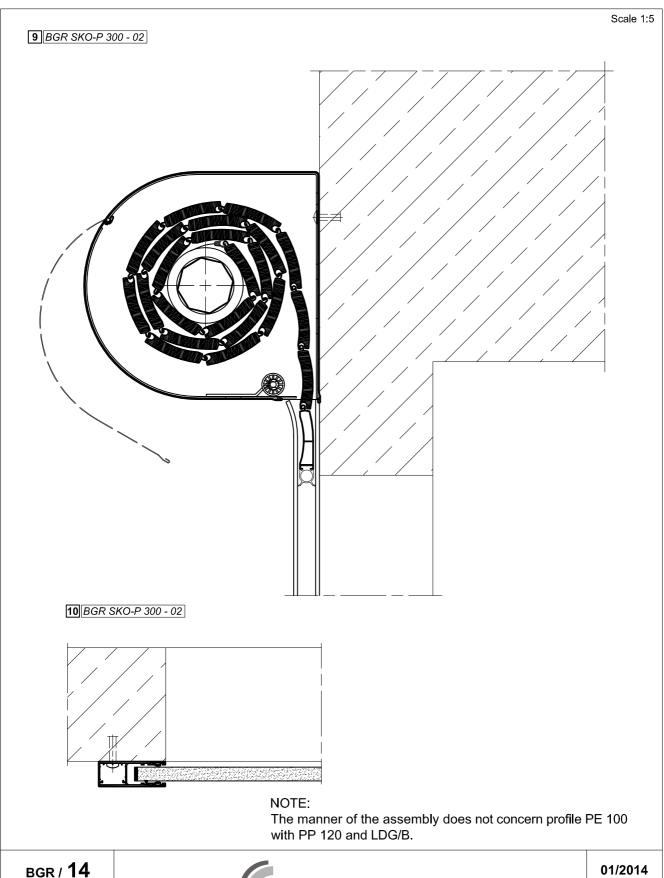



Scale 1:5 **11** BGR SKO-P 250 - 03 **12** BGR SKO-P 250 - 03 The manner of the assembly does not concern profile PE 100 with PP 120 and LDG/B. **BGR / 15** 01/2014 ALUPROF



